


ANPx311/RES/LT/HV - linear x-nanopositioner

1008594

Technical Specifications

Size and Dimensions	
footprint; height	34 mm x 30 mm; 10 mm
maximum installation space	34 mm x 36 mm; 10 mm
weight	32 g
Materials	
positioner body	titanium
actuator	PZT ceramics
connecting wires	insulated twisted pair, copper
Coarse Positioning Mode	
travel range (step mode)	5.8 mm
maximum drive velocity @ 300 K	~ 3 mm/s
Fine Positioning Mode	
fine linear positioning range @ 300 K	5 μ m
fine linear positioning range @ 4 K	0.8 μ m
fine positioning resolution	sub-nm
input DC voltage range @ 4 K	0 - 150 V
Position Encoder	
readout mechanism	resistive sensor
sensor resolution	~ 200 nm
repeatability	1..2 μ m (unidirectional)
Load (@ ambient conditions)	
maximum load	2 kg
maximum dynamic force along the axis	2 N
General Specifications	
environment	/LT/HV
min. first natural frequency	2600 Hz

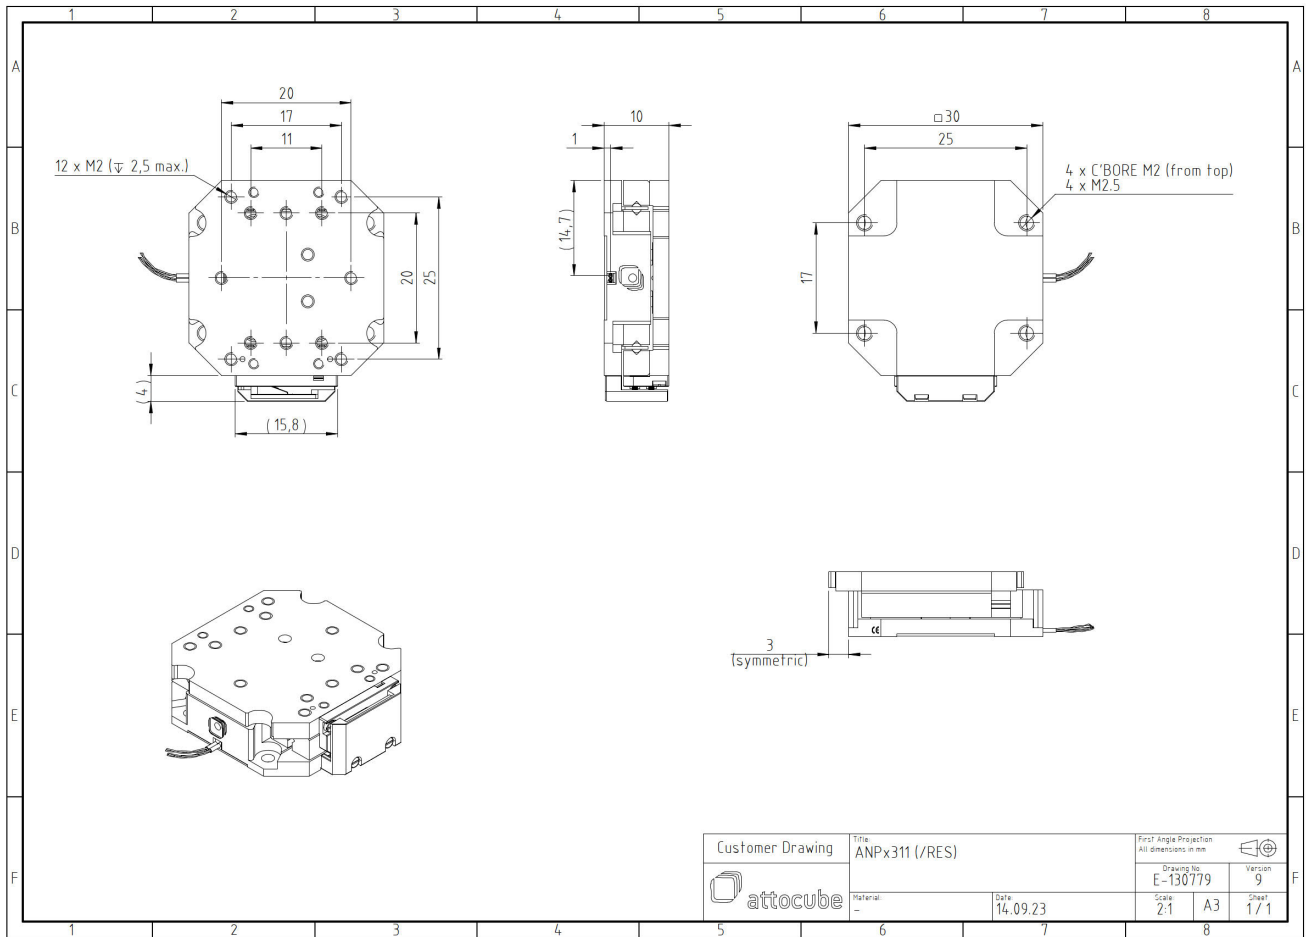

Customer Drawing	Title: ANPx311 (/RES)		First Angle Projection All dimensions in mm	
	Material: -		Drawing No: E-130779	Version: 9
Date: 14.09.23		Scale: 2:1	A3	Sheet: 1 / 1

