


# ANPz101/RES/LT/HV - linear z-nanopositioner

1002817

## Technical Specifications

<b>Size and Dimensions</b>	
footprint; height	24 mm x 24 mm; 20 mm
maximum installation space	24 mm x 24 mm; 25 mm
weight	38 g
height	20 mm
cable	30 cm cable with connector
<b>Materials</b>	
positioner body	titanium
actuator	PZT ceramics
connecting wires	insulated twisted pair, copper
<b>Coarse Positioning Mode</b>	
travel range (step mode)	5 mm
maximum drive velocity @ 300 K	~ 3 mm/s
input voltage range	0 - 60 V
<b>Fine Positioning Mode</b>	
fine linear positioning range @ 300 K	3.5 $\mu$ m
fine linear positioning range @ 4 K	0.5 $\mu$ m
fine positioning resolution	sub-nm
input DC voltage range @ 300 K	0 - 100 V
input DC voltage range @ 4 K	0 - 150 V
<b>Position Encoder</b>	
readout mechanism	resistive sensor
encoded travel range	full travel
sensor resolution	~ 200 nm
sensor power (when measuring)	0.01 - 1 mW
repeatability	1..2 $\mu$ m (unidirectional)
<b>Load (@ ambient conditions)</b>	
maximum load	100 g
maximum dynamic force along the axis	5 N
<b>General Specifications</b>	
environment	/LT/HV

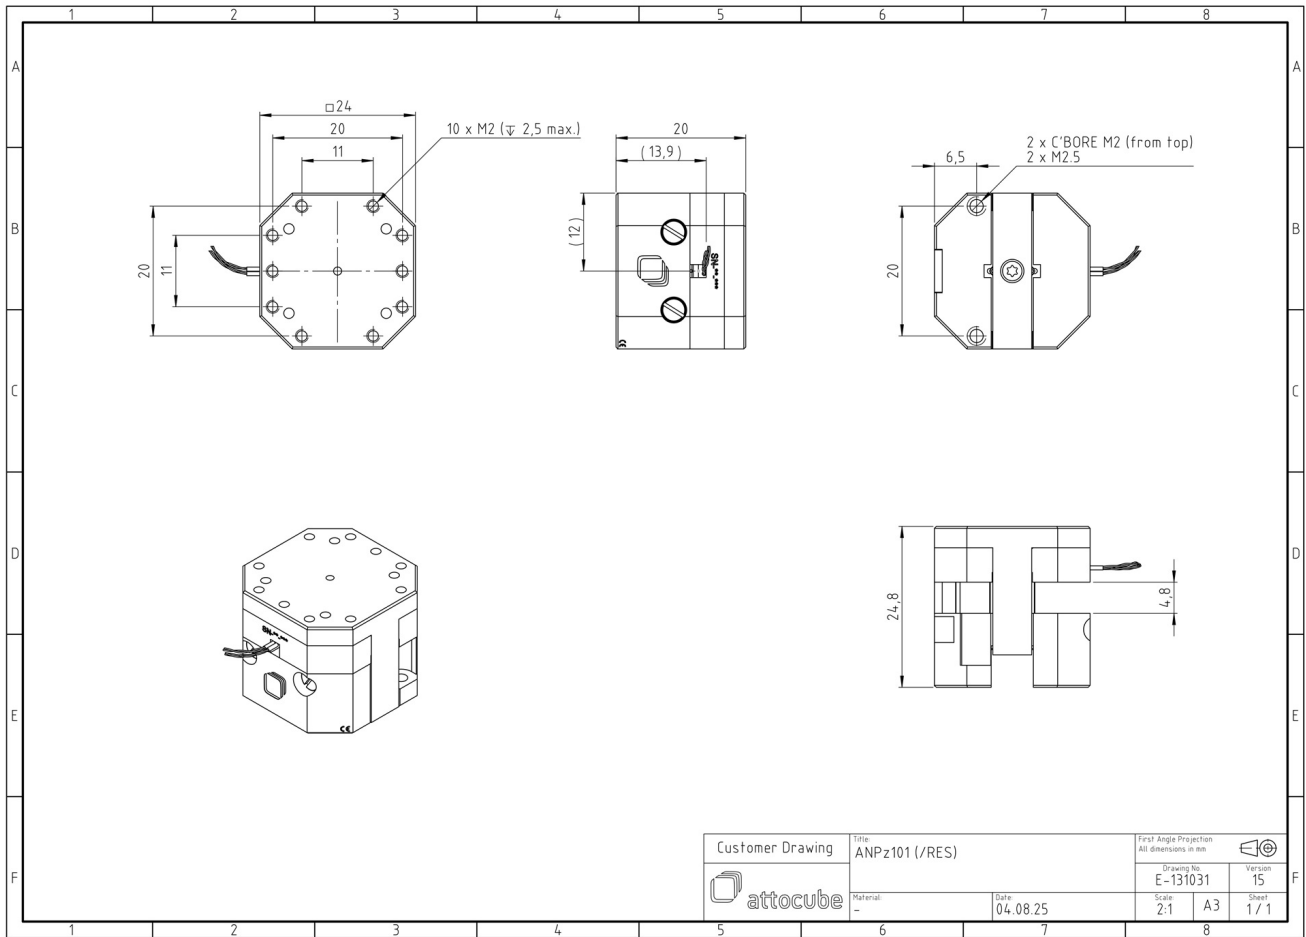

Customer Drawing	Title: ANPz101 (/RES)		First Angle Projection All dimensions in mm	
	Material: --		Drawing No: E-131031	Version: 15
Date: 04.08.25		Scale: 2:1	A3	Sheet: 1 / 1