


ANPz51/RES/RT - linear z-nanopositioner

1003267



Technical Specifications

Size and Dimensions	
footprint; height	15 mm x 18 mm; 13.5 mm
maximum installation space	15 mm x 18 mm; 16 mm
weight	13 g
height	13.5 mm
cable	30 cm cable with connector
Materials	
positioner body	titanium
actuator	PZT ceramics
connecting wires	insulated twisted pair, copper
Coarse Positioning Mode	
travel range (step mode)	2.5 mm
maximum drive velocity @ 300 K	~ 1 mm/s
input voltage range	0 - 60 V
Fine Positioning Mode	
fine linear positioning range @ 300 K	3.5 μ m
fine positioning resolution	sub-nm
input DC voltage range @ 300 K	0 - 100 V
Position Encoder	
readout mechanism	resistive sensor
encoded travel range	full travel
sensor resolution	~ 200 nm
sensor power (when measuring)	0.01 - 1 mW
repeatability	1..2 μ m (unidirectional)
Load (@ ambient conditions)	
maximum load	50 g
maximum dynamic force along the axis	1 N
General Specifications	
environment	/RT

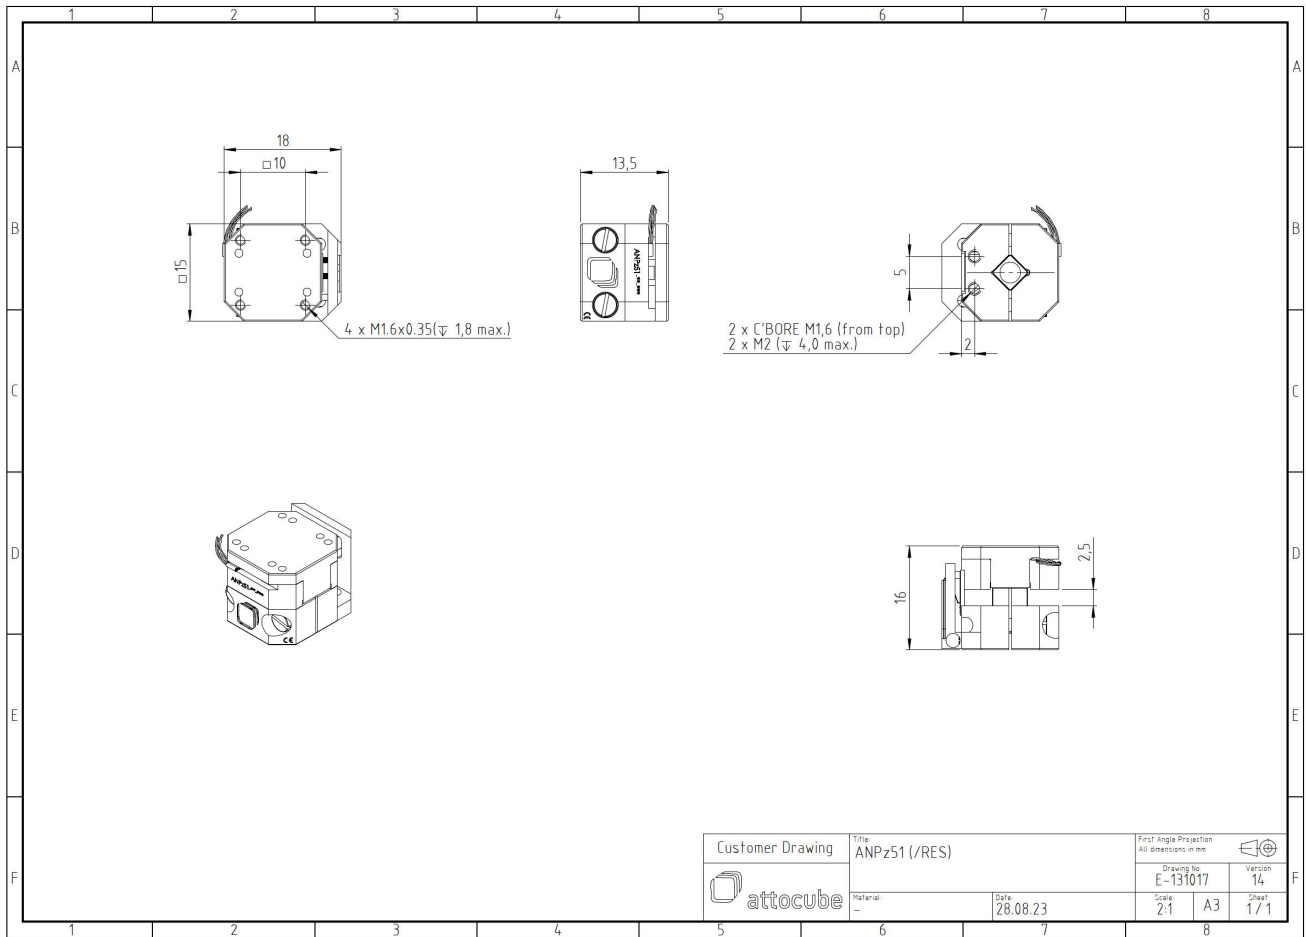

Customer Drawing	Title: ANPz51 (/RES)		First Angle Projection All dimensions in mm	
	Material: ---		Drawing No: E-131017	Version: 14
Date: 28.08.23		Scale: 2:1	A3	Sheet: 1 / 1