


# attoDRY800 Optical Table Configuration

Project: \_\_\_\_\_

Table Length: 72 " Table Width: 36 "

x: 36.5 " y: 10.5 "

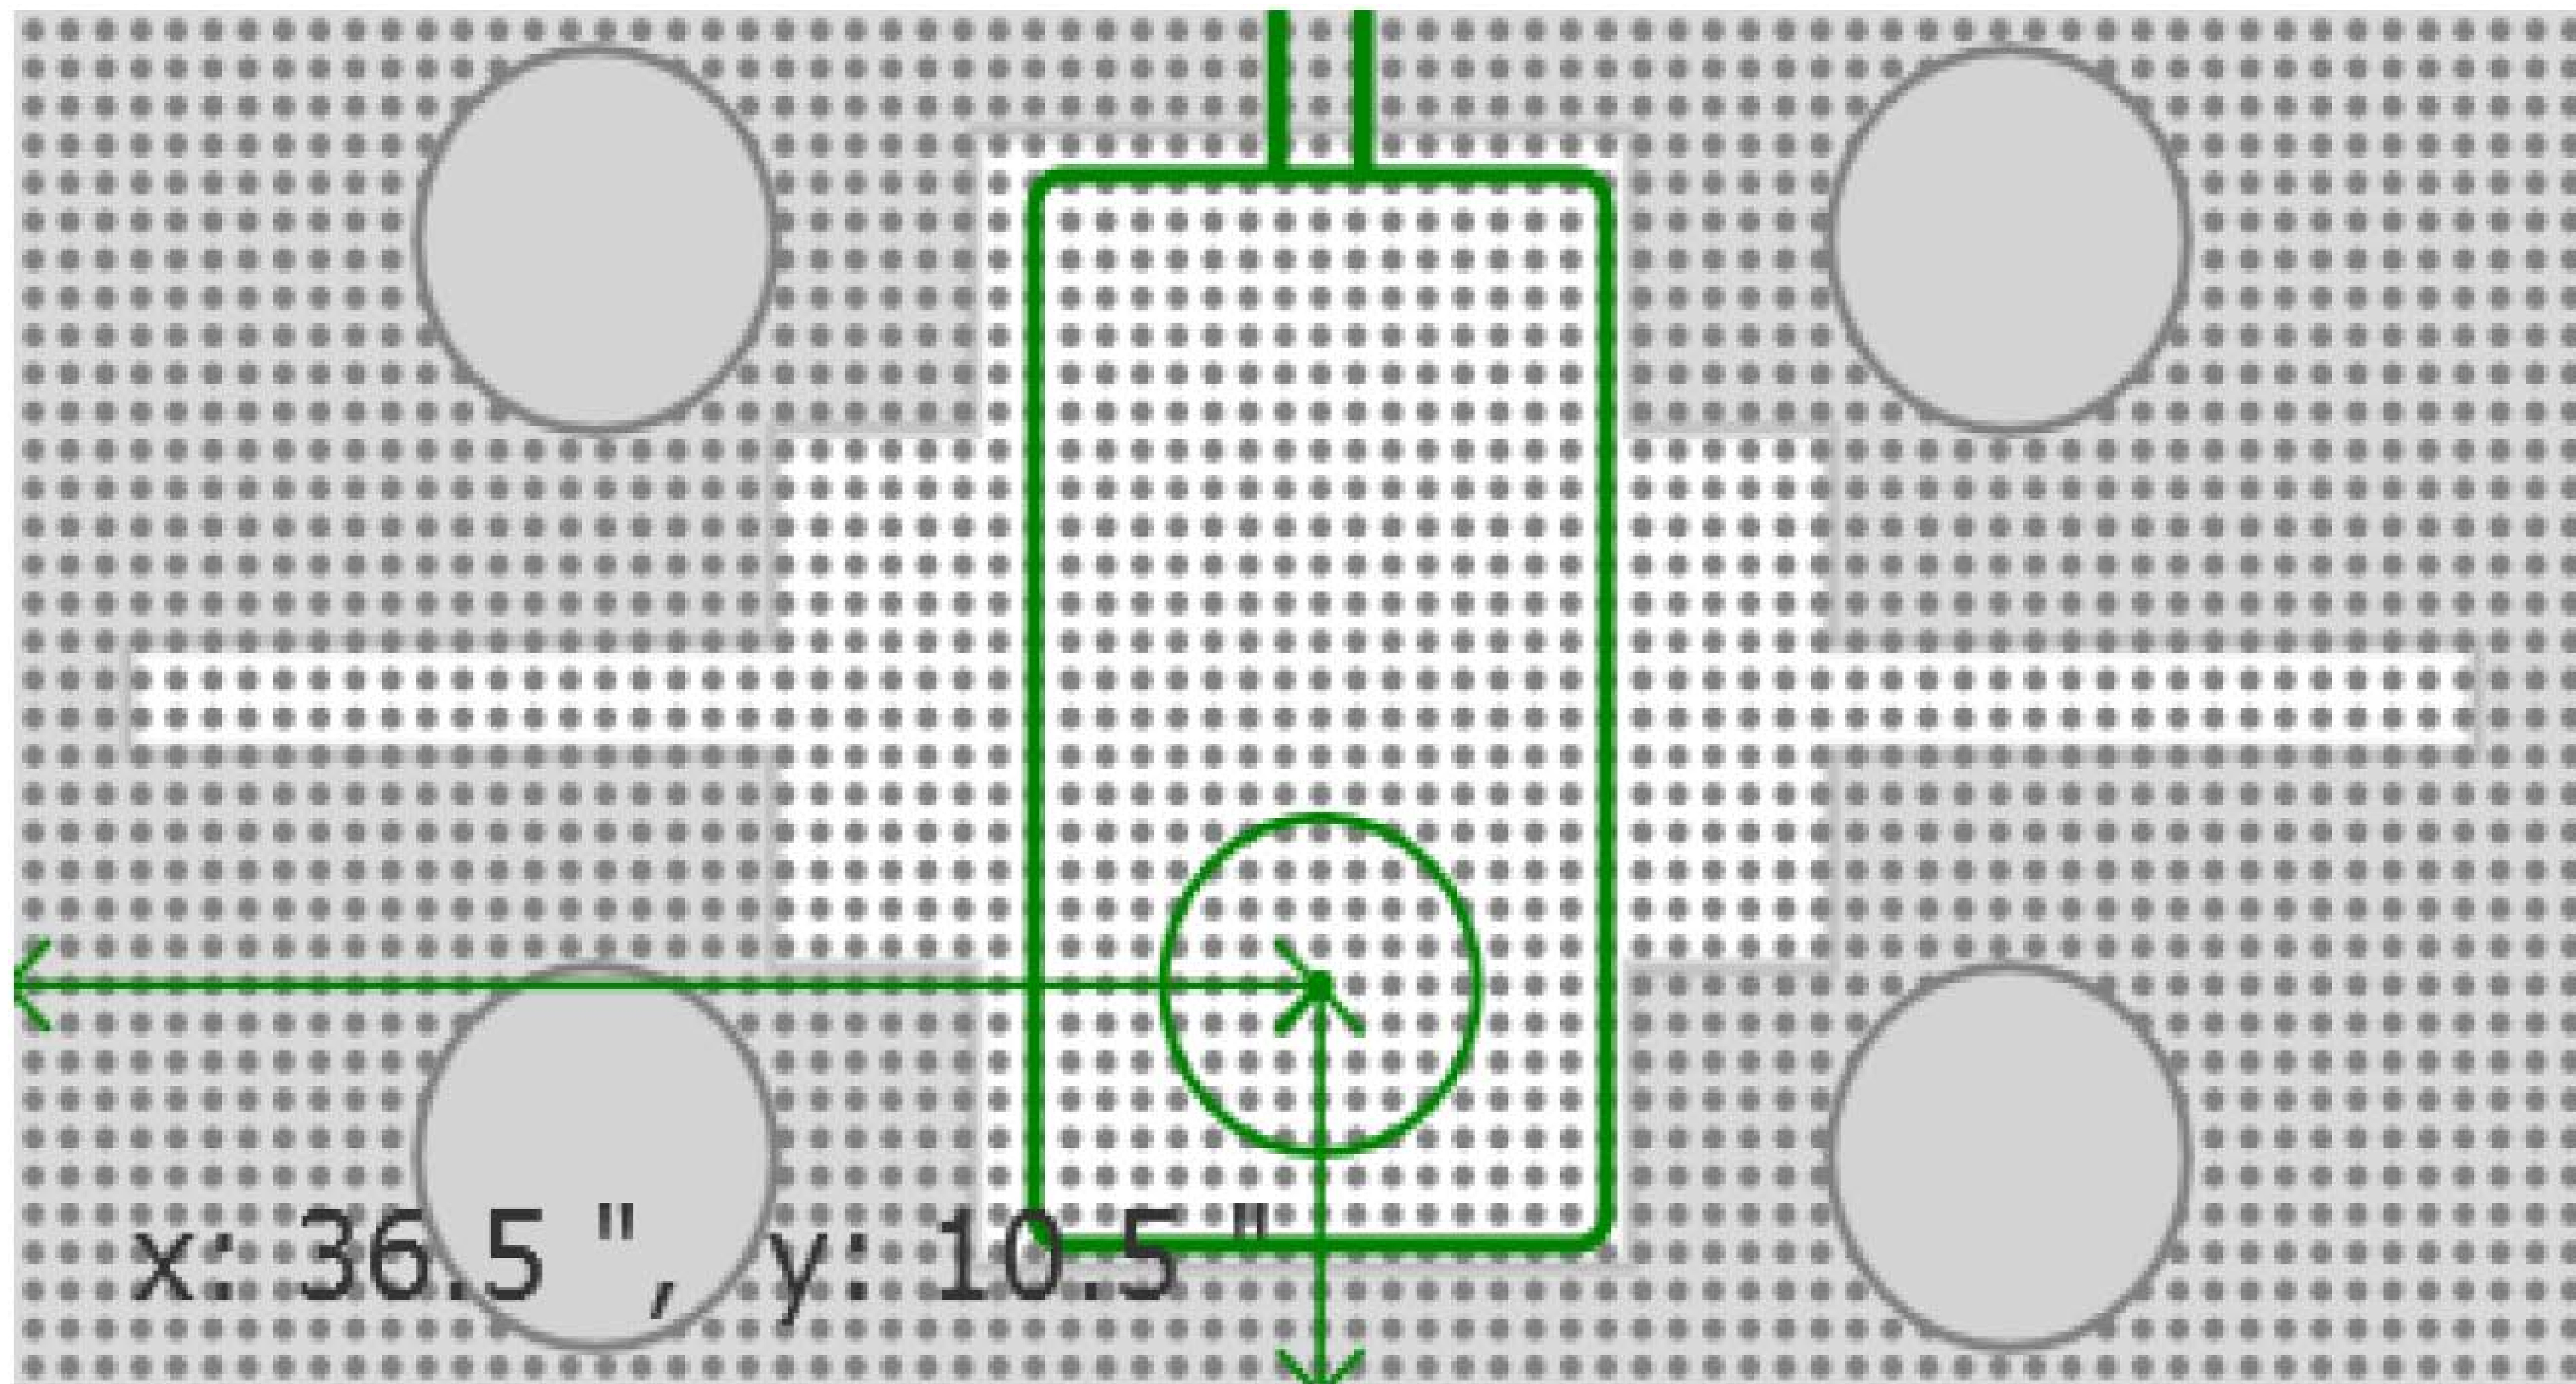

## Approval

Signature: \_\_\_\_\_ Date: \_\_\_\_\_

Delivery Address: \_\_\_\_\_

Contact Person: \_\_\_\_\_

Tel. contact person: \_\_\_\_\_

Confirmation of special table options:

- |  |   |
|--|---|
| <input type="radio"/> Significantly less magnetic table top only   | <input type="radio"/> Significantly less magnetic top and bottom skins                      |
| <input type="radio"/> Special 1: Fully non-magnetic table construction<br>(top and bottom skins, trussed honeycomb core) | <input type="radio"/> Special 2: Additionally non-magnetic pneumatic<br>vibration isolators |
| <input type="radio"/> Table coupler required for joining 2 or more optical<br>tables                                     |   |